





Reductor a Engranajes para Extrusora

De 2 etapas a Engranajes Helicoidales
de disposición paralela a ejes desplazados

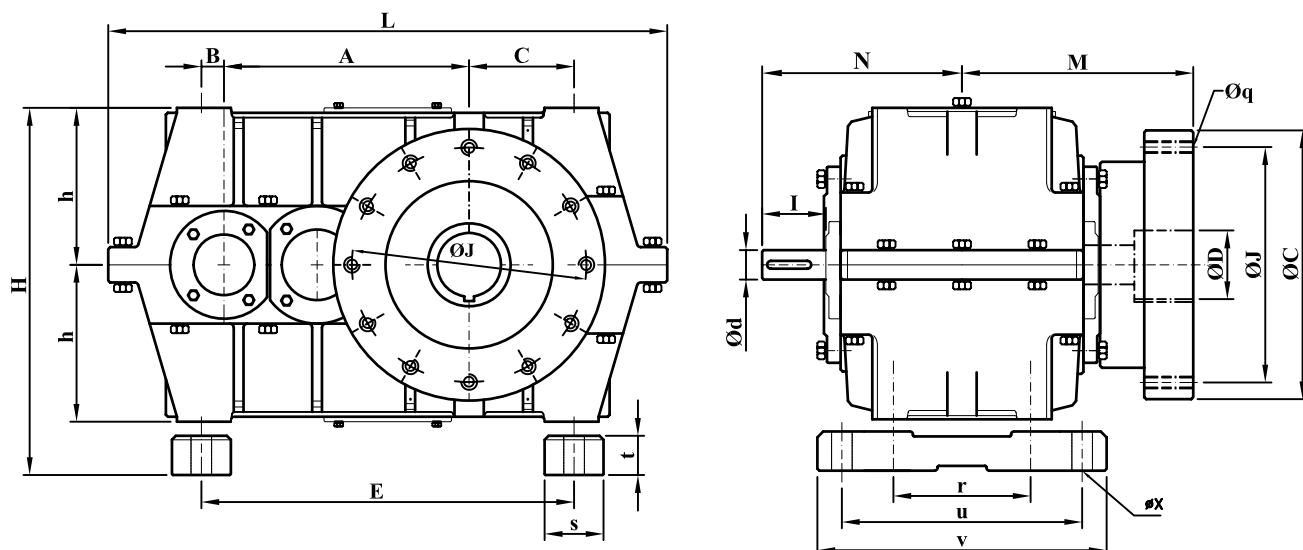

Modelo Extrusora VF-2E..	Dimensiones en milímetros																			Crapodina	Capaci d Lubri	
	A	B	C	D	H	I	J	L	M	N	d	h	r	s	t	u	v	x	q _{BSV}	Y	Instalada	lts.
160 E	160	20	205	30	250	60	170	395	185	138	20	110	84	45	30	166	194	14	7/16"	80	51311	4
200 E	200	17	235	32	305	75	205	480	220	193	25	135	105	54	35	200	240	17	1/2"	130	29412	5
250 E	250	23	280	40	360	76	245	570	277	214	30	160	125	60	40	245	295	21	5/6"	140	29414	7
300 E	300	21	330	50	415	97	290	670	320	255	40	185	150	70	45	280	340	24	3/4"	160	29417	9
350 E	350	25	360	60	495	122	320	780	355	298	50	220	170	84	55	320	390	28	3/4"	170	29420	13
400 E	400	28	410	70	565	117	360	900	382	313	55	250	190	100	65	360	440	34	3/4"	180	29422	17
450 E	450	38	420	80	640	166	380	1020	427	393	60	285	210	110	70	400	490	34	3/4"	190	29426	25
500 E	500	31	450	85	705	163	400	1130	460	404	65	315	240	130	75	450	550	42	3/4"	200	29428	40
560 E	560	145	485	90	724	125	450	1150	571	445	75	375	550	—	—	550	600	28	1"	230	29332	62

Disposiciones de Montaje

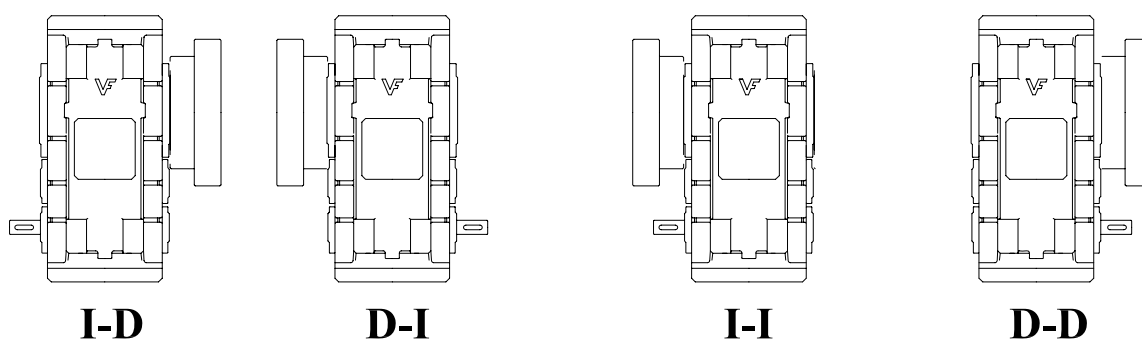

**POTENCIA TRANSMISIBLE (en c.v)**

Reductor		Modelo		VF - 2E - 160E								
Relación	Transmis	1: 6, 2	1: 7, 6	1: 9, 3	1: 11, 4	1: 13, 9	1: 17, 1	1: 20, 9	1: 25, 6	1: 31, 4	1:38,4	Límite.T
Potencia	1500	35	29	21	15	11	8	6	3	1, 3	-----	35
Transmi	1000	28	20	14	9	7	5	3	1, 4	0, 75	-----	41
en c.v	750	19	13	9	6	4	3	1, 5	0, 8	0, 3	-----	56
a r.p.m	500	12	8	6	3	2	1, 2	1	0, 5	-----	-----	81

Reductor		Modelo		VF - 2E - 200E								
Relación	Transmis	1: 6, 2	1: 7, 6	1: 9, 3	1: 11, 4	1: 13, 9	1: 17, 1	1: 20, 9	1: 25, 6	1: 31, 4	1:38,4	Límite.T
Potencia	1500	51	45	34	27	22	18	15	12	8	4	42
Transmi	1000	41	32	23	19	15	12	10	8	6	3, 5	48
en c.v	750	33	25	19	16	13	9	8	7	5	2, 7	52
a r.p.m	500	27	18	16	12	9	7	6	5	3, 4	2	56

Reductor		Modelo		VF - 2E - 250E								
Relación	Transmis	1: 6, 2	1: 7, 6	1: 9, 3	1: 11, 4	1: 13, 9	1: 17, 1	1: 20, 9	1: 25, 6	1: 31, 4	1:38,4	Límite.T
Potencia	1500	82	79	57	47	39	35	27	22	16	10	61
Transmi	1000	68	55	42	33	28	23	19	15	10	6, 5	71
en c.v	750	54	42	36	28	23	19	17	13	8	5	77
a r.p.m	500	41	36	27	22	17	15	12	9	7	4	83

Reductor		Modelo		VF - 2E - 300E								
Relación	Transmis	1: 6, 2	1: 7, 6	1: 9, 3	1: 11, 4	1: 13, 9	1: 17, 1	1: 20, 9	1: 25, 6	1: 31, 4	1:38,4	Límite.T
Potencia	1500	112	98	76	63	46	42	36	26	19	11	92
Transmi	1000	89	68	55	45	36	28	24	18	14	8	112
en c.v	750	67	56	47	37	27	25	19	15	11	7	117
a r.p.m	500	54	44	34	29	23	18	15	11	8, 5	5	125

Reductor		Modelo		VF - 2E - 350E								
Relación	Transmis	1: 6, 2	1: 7, 6	1: 9, 3	1: 11, 4	1: 13, 9	1: 17, 1	1: 20, 9	1: 25, 6	1: 31, 4	1:38,4	Límite.T
Potencia	1500	145	135	105	87	76	61	50	38	27	17	119
Transmi	1000	106	94	76	64	51	41	35	26	19	12	138
en c.v	750	91	83	62	55	45	31	28	21	16	9	149
a r.p.m	500	82	75	47	38	34	23	22	17	12	7, 5	157

Reductor		Modelo		VF - 2E - 400E								
Relación	Transmis	1: 6, 2	1: 7, 6	1: 9, 3	1: 11, 4	1: 13, 9	1: 17, 1	1: 20, 9	1: 25, 6	1: 31, 4	1:38,4	Límite.T
Potencia	1500	297	286	238	183	153	135	101	82	61	37	141
Transmi	1000	246	201	162	128	108	88	72	56	42	26	171
en c.v	750	214	175	143	109	95	73	63	46	35	21	185
a r.p.m	500	162	131	102	85	67	56	45	34	28	17	194

Reductor		Modelo		VF - 2E - 450E								
Relación	Transmis	1: 6, 2	1: 7, 6	1: 9, 3	1: 11, 4	1: 13, 9	1: 17, 1	1: 20, 9	1: 25, 6	1: 31, 4	1:38,4	Límite.T
Potencia	1500	409	385	312	240	197	185	143	112	82	53	178
Transmi	1000	365	273	224	162	145	132	102	78	57	37	209
en c.v	750	284	241	175	138	122	104	84	62	44	29	225
a r.p.m	500	186	177	142	112	89	78	65	49	37	24	241

Reductor		Modelo		VF - 2E - 500E								
Relación	Transmis	1: 6, 2	1: 7, 6	1: 9, 3	1: 11, 4	1: 13, 9	1: 17, 1	1: 20, 9	1: 25, 6	1: 31, 4	1:38,4	Límite.T
Potencia	1500	625	534	421	312	284	236	201	151	109	79	215
Transmi	1000	452	373	315	222	189	165	138	103	88	58	258
en c.v	750	362	314	226	187	168	126	95	82	63	48	274
a r.p.m	500	305	240	185	164	124	94	77	65	49	31	285

Reductor		Modelo		VF - 2E - 560E								
Relación	Transmis	1: 6, 2	1: 7, 6	1: 9, 3	1: 11, 4	1: 13, 9	1: 17, 1	1: 20, 9	1: 25, 6	1: 31, 4	1:38,4	Límite.T
Potencia	1500	812	736	584	481	421	324	276	202	146	108	254
Transmi	1000	654	516	425	345	286	225	191	138	103	78	298
en c.v	750	558	425	342	276	243	174	148	107	85	68	325
a r.p.m	500	425	331	261	221	181	125	120	88	67	51	334